


I, Tadahiko Itoh, a Patent Attorney of Tokyo, Japan having my office at 32nd Floor, Yebisu Garden Place Tower, 20-3 Ebisu 4-Chome, Shibuya-Ku, Tokyo 150-6032, Japan do solemnly and sincerely declare that I am the translator of the attached English language translation and certify that the attached English language translation is a correct, true and faithful translation of Japanese Patent Application No. 2000-377692 to the best of my knowledge and belief.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.



Tadahiko ITOH
Patent Attorney
ITOH International Patent Office
32nd Floor,
Yebisu Garden Place Tower,
20-3 Ebisu 4-Chome, Shibuya-Ku,
Tokyo 150-6032, Japan



RECEIVED

OCT 28 2004

Technology Center 2600

JPA No. 2000-377692

(Document Name)	Application For Patent
(Reference Number)	TEP001001A
(Date of Submission)	December 12, 2000
(Destination)	Commissioner of Patent Office
	Mr. Kouzo Oikawa
(IPC)	G11B 7/00
(Inventor)	
(Residence or Address)	C/O TEAC CORPORATION
	7-3, Naka-cho 3-chome, Musashino-shi,
	Tokyo, 180-8550 Japan
(Name)	Kenji Takahashi
(Inventor)	
(Residence or Address)	C/O TEAC CORPORATION
	7-3, Naka-cho 3-chome, Musashino-shi,
	Tokyo, 180-8550 Japan
(Name)	Kohshin Nakayama
(Applicant for Patent)	
(Identification Number)	000003676
(Name)	TEAC CORPORATION
(Attorney)	
(Identification Number)	100070150
(Patent Attorney)	
(Name)	Tadahiko Itoh
(Indication of Official Fees)	
(Prepayment Ledger Number)	002989
(Amount Paid)	¥21,000
(Lists of Submitted Documents)	
(Document Name)	Specification 1
(Document Name)	Drawing 1
(Document Name)	Abstract 1
(Proof Requested or Not)	Requested



RECEIVED
OCT 28 2004
Technology Center 2600

【Name of Document】 Specification

【Name of Invention】 An optical pick-up device

【Claims】

【Claim 1】

An optical pick-up device comprising:

a lens that focuses light onto a recording medium;

a lens holder that holds the lens;

a support oppositely displaced behind of the lens holder;

a frame formed so as to be disposed opposite both lateral surfaces of the lens holder and the distal end of the lens holder;

a plurality of cantilevered springs engaged the lens holder with one of the springs and connected the support with another of the springs; and

an actuator that drives the lens holder, the actuator including a focus coil, a tracking coil and a magnet;

wherein a plurality of projections is provided on at least one of the lens holder and the frame, the projections restricting a rotation of the lens holder.

【Claim 2】

The optical pick-up device as claimed in claim 1, wherein the plurality of projections is provided at least on one of either the lateral surfaces of the lens holder toward the proximal end of the lens holder and lateral surfaces of the frame.

【Claim 3】

The optical pick-up device as claimed in claim 1, wherein the plurality of projections are provided on each of two lateral surfaces of either the lateral surface of the lens holder and the distal end of the lens holder.

【0001】

【Field of Invention】

The present invention relates generally to an optical pick-up device, and more particularly, to an improved optical pick-up device, in which a lens holder that holds a lens that focuses light onto a recording surface of the recording medium is movably supported by cantilever springs.

【0002】

【Background】

In for example CD-ROM or CD-RW disk drive units in which a rotating disk-like recording medium (hereinafter simply "disk") is loaded, a laser beam is projected onto the disk and information is

recorded (written) onto the disk or reproduced (read) from the disk. The optical pick-up device installed in such types of disk drive units includes, among other components, an object lens that directs a laser beam emitted from a laser diode onto the disk. The orientation of the object lens is adjusted so that the focus of the light directed onto the disk by the object lens coincides with a recording surface of the disk.

【0003】

In other words, an optical pick-up device performs focus control and tracking control so that the object lens follows changes in the track due to eccentricities in the rotation of the disk and/or wobble due to rotation of the disk. This type of control of the object lens is performed by an actuator using an electromagnetic force, the actuator being typically composed of a combination of a coil and a magnet.

【0004】

A lens holder that supports the object lens is made compact and lightweight in order to facilitate focus and tracking control, with four wire-like elastic supports (that is, cantilever springs) arranged in parallel forming a supporting structure that supports the lens holder and that moves minutely in either a focus direction or a tracking direction, as the case may be, by the driving force from the actuator.

【0005】

Further, the lens holder is placed so as to be contained within a frame formed into the shape of the letter U, the open portion being at a proximal end. Base portions of the four wire-like elastic supports are joined to a suspension fixedly mounted on a distal end of the frame, with tip portions joined to the lateral surfaces of the lens holder. As a result, the lens holder is supported by the four wire-like elastic supports in such a way as to be movable in a direction parallel to the frame.

【Problems to be solved】

However, a drawback of the above-described conventional optical pick-up device is that, when installed in a laptop personal computer and such apparatus is dropped during handling, the movement of the lens holder caused by such an impact on the pick-up unit is greater than that which is normally imparted thereto, thus damaging the wire-like elastic supports.

【0006】

It is possible to provide the lens holder with lateral

projections protruding therefrom, so that the projections contact the frame so as to restrict the range of movement of the lens holder and thus prevent the lens holder from being damaged by excessive movement. However, if the center of gravity of the lens holder and the center drive point of the actuator diverge from each other, an angular moment comes into play around the projection after the projection contacts the frame, thus twisting or rotating the lens holder around the tip of the projection and thereby deforming the wire-like elastic supports.

【0007】

With the disk drives installed in laptop personal computers in particular, in which a seek direction (that is, the tracking direction) of the optical pick-up is slanted at approximately a 45 degree angle with respect to a front panel of the disk holder (thus taking advantage of the additional length afforded by using a corner of the disk drive unit frame instead of a lateral side of the frame), the direction of the shock of impact upon dropping the laptop (assuming the laptop is dropped on the front panel of the disk holder) and the direction of drive of the actuator are at approximately a 45 degree angle with respect to each other.

【0008】

If the wire-like elastic supports are thus deformed, then the positioning and angle of the lens can change and information can no longer be written to or read from the disk. It is possible to use relatively thick wire for the wire-like elastic supports so as to prevent the wire-like elastic supports from being deformed by the shock of impact. However, the thicker the wire the more rigid the wire-like elastic support, which makes it more difficult to move the primary resonance frequency (at which focus control and tracking control low-frequency sensitivity tends to deteriorate) to a desired frequency.

【0009】

In order to set the primary resonance frequency to a desired frequency and prevent focus control and tracking control low-frequency sensitivity from deteriorating, the longer the suspension the better. However, the conventional optical pick-up typically installed in an ordinary laptop computer, and particularly the recording pick-up, has a substantial number of mounted parts, thus limiting the space available to lengthen the suspension.

Accordingly, it is an object of the present invention to provide an improved and useful optical pickup device, in which the

above-described disadvantage is eliminated.

【0010】

【Means for resolving of the problems】

The above-described object of the present invention is achieved as followings.

【0011】

The present invention as described in claim 1 is an optical pick-up device comprising a plurality of projections which limit the movement of the lens holder to the lens holder or the frame is provided, it can be prevented the excess displacement the lens holder by any impact and can be prevented to distort the cantilevered springs without acting the rotation moment to the lens holder.

【0012】

The present invention as described in claim 2 is an optical pick-up device comprising a plurality of projections is provided at least on one of either the lateral surfaces of the lens holder toward the proximal end of the lens holder and lateral surfaces of the frame, it can be prevented the excess displacement of the lens holder by the impact and can be prevented to distort the cantilevered springs without acting the rotation moment to the lens holder.

【0013】

The present invention as described in claim 2 is an optical pick-up device comprising a plurality of projections are provided on each of two lateral surfaces of either the lateral surface of the lens holder and the distal end of the lens holder, it can be prevented the excess displacement of the lens holder by the impact and can be prevented to distort the cantilevered springs without acting the rotation moment to the lens holder.

【Mode for carrying out of Invention】

These and other objects, features, aspects and advantages of the present invention will become better understood and more apparent from the following description, appended claims and accompanying drawings.

FIG. 1 is a perspective view of an optical pickup device according to one embodiment of the present invention. FIG. 2 is a plan view of an optical pick-up device according to one embodiment of the present invention. FIG. 3 is a lateral cross-sectional view of an optical pick-up device according to one embodiment of the present invention. FIG. 4 is a perspective exploded view of a movable part and a yoke base that supports the movable part.

【0014】

As shown in FIGS. 1-4, an optical pick-up device 10 comprises an object lens 12, a lens holder 14 that holds the object lens 12, a yoke base 15 (hereinafter frame 15) that supports the lens holder 14, a focus coil 16 mounted on the lens holder 14 and a tracking coil 18 mounted on the lens holder 14, a pair of magnets 30, 32, a yoke 22 integrally mounted on the frame 15 that supports the pair of magnets 30, 32, a suspension holder 24 fixedly mounted on the frame 15 and that supports four wire-like elastic supports-in actuality cantilever springs-26a, 26b, 26c and 26d positioned between the frame 15 and the lens holder 14. The lens holder 14 is thus supported by the four cantilever springs 26a-26d so as to be movable in a horizontal tracking direction (that is, a direction indicated by arrow A-B) as well as in a vertical focusing direction (a direction indicated by arrow C-D), the four cantilever springs 26a-26d being arranged in parallel.

【0015】

The focus coil 16 is an actuator for driving the object lens 12 in a vertical direction. The tracking coil 18 is an actuator for driving the object lens 12 in the horizontal direction. The yoke 22, which has a pair of U-shaped arms 22a, 22b bent so as to extend vertically, is fixedly mounted on a floor plate 15c disposed between a pair of arms 15a, 15b extending horizontally from the frame 15. The magnet 30 is mounted on one arm 22a of the yoke 22 so as to pass through an interior of the focus coil 16. The magnet 32 is mounted on the other arm 22b of the yoke 22, opposite the tracking coil 18.

【0016】

A first set of projections 37a, 37b project laterally from lateral surfaces of a proximal end of the lens holder 14. A second set of projections 38a, 38b project laterally from an intermediate position on the lateral surfaces of the lens holder 14. Finally, a third set of projections 39a, 39b project from the suspension holder 24 toward a distal end 14c of the lens holder 14.

【0017】

The first set of projections 37a, 37b are shorter than the second set of projections 38a, 38b by approximately 1 to 2 mm, so when the lens holder 14 swings the second set of projections 38a, 38b contacts an inner surfaces of the arms 15a, 15b of the frame 15 first, after which the first set of projections 37a, 37b then contacts the inner surfaces of the arms 15a, 15b so as to restrict a rotation of the lens holder.

【0018】

Additionally, as noted previously, the distal end 14c of the lens holder 14 opposes the third set of projections 39a, 39b, thus restricting a rotation of the lens holder 14 in a direction opposite the direction or rotation restricted by the first set of projections 37a, 37b when the distal end 14c of the lens holder 14 contacts the third set of projections 39a, 39b.

【0019】

Accordingly, the contacting of the first set of projections 37a, 37b and the second set of projections 38a, 38b against the inner surfaces of the arms 15a, 15b of the frame 15 prevents a rotational moment from acting on the cantilever springs 26a-26d, thereby preventing the cantilever springs 26a-26d from being deformed by an excessive force and preventing a deterioration in accuracy in the focus control or tracking control of the lens holder due to the impact of an external shock.

【0020】

The suspension holder 24 is fixedly mounted on a mounting part 15d of the frame 15 together with a printed circuit board 34 by a screw 36. A base portion of the cantilever springs 26a-26d, which are positioned so as to extend in a horizontal direction, penetrates the printed circuit board 34. A proximal tip (that is, a free end) of the cantilever springs 26a-26d passes above and below the second set of projections 38a, 38b. Additionally, silicon gel adhesives 40 for elastically mounting the cantilever springs 26a-26d are adhered to a proximal surface of the suspension holder 24. The adhesive 40 is gelled by ultraviolet radiation so as to provide the cantilever springs 26a-26d with a viscous damping effect with respect to movement of the lens holder 14 in a focus direction and movement of the lens holder 14 in a tracking direction.

【0021】

Additionally, ends of the focus coil 16 and the tracking coil 18 are connected to relay substrates 42, 44 through which the free ends of the cantilever springs 26a-26d pass, with an electrical current being supplied to the focus coil 16 and the tracking coil 18 via the cantilever springs 26a-26d. It should be noted that a movable part 46 subject to focus control and tracking control comprises the above-described object lens 12, lens holder 14, focus coil 16, tracking coil 18, and coil relay substrates 42, 44.

The object lens 12 supported by the lens holder 14 is adjusted

to a position at which an electromagnetic force generated by the passing of current through the focus coil 16 and the tracking coil 18 is balanced with a magnetic force arising between the pair of magnets 30, 32.

【0022】

A more detailed description will now be given of the structure of the lens holder 14. The lens holder 14 has a lens holder part 14a and a coil holder part 14b that extends distally toward the suspension holder 24 from the lens holder part 14a and supports the focus coil 16 and the tracking coil 18.

【0023】

As shown in FIG. 3, a laser beam emitted from a laser diode 28 is reflected by a reflecting mirror 50 toward the object lens 12, where it is focused onto a disk 12 disposed opposite to and above the object lens 12. The pair of magnets 30, 32 are disposed opposite the U-shaped mounting arms 22a, 22b of the yoke 22, and opposite the focus coil 16 and tracking coil 18 provided on the lens holder 14. As noted previously, the lens holder 14 is movably supported by the four cantilever springs 26a-26d that extend horizontally.

【0024】

FIG. 5 is a plan view showing a case in which an impact acts in a direction B on an optical pick-up device according to the present invention.

【0025】

As shown in FIG. 5, in a case in which the optical pick-up 10 is subjected to an impact force F acting in the direction indicated as B in the drawing, the lens holder 14 supported by the four cantilever springs 26a-26d moves in the B direction and the second projection 38a projecting from the lateral surface of the lens holder 14 contacts the inner surface of the arm 15a of the frame 15, after which the first projection 37a projecting from the lateral surface of the lens holder 14 contacts the inner surface of the arm 15a of the frame 15. As a result, a counter-clockwise rotation of the lens holder 14 is stopped by the first projection 37a and the second projection 38a coming into contact with the inner surface of the arm 15a. Additionally, after the second projection 38a contacts the inner surface of the arm 15a, the third projection 39a extending proximally from the suspension holder 24 toward a distal end 14c of the lens holder 14 keeps the lens holder 14 from rotating in a clockwise direction.

【0026】

Thus, damage to the cantilever springs 26a-26d can be prevented

even in the event of an external shock to the unit because the first set of projections 37a, 37b, the second set of projections 38a, 38b and the third set of projections 39a, 39b function as stoppers that restrict the rotation of the lens holder 14.

【0027】

A description will now be given of the above-described optical pick-up device 10 installed in a typical CD-ROM drive unit.

FIG. 6 is a perspective view of a disk drive unit. FIG. 7 is a plan view of a disk drive unit. FIG. 8 is a plan view of a disk drive unit with the tray extended.

As shown in FIG. 6, a disk drive unit 61 is for example a CD-ROM drive unit installed in a laptop-type personal computer, and includes a top cover (for ease of description not shown in the figure), a bottom cover 66, with a turntable 68 rotatably supported by a tray 70 in a space created between the top cover and the bottom cover 66. At a center of the turntable 68 there is a clamp mechanism 73 for engaging a disk 52 at an inner periphery of the disk 52 so as to clamp the disk 52 firmly onto the turntable 68. A disk container 74 having a diameter larger than that of the disk 52 is disposed around an outer periphery of the turntable 68.

【0028】

The optical pick-up device 10 for reading information recorded on the disk 52 clamped to the turntable by the clamping mechanism 73 of the turntable 68 is mounted below the disk container 74 so as to be movable in a direction of a radius of the disk 52 (hereinafter radial direction of the disk). The optical pick-up device 10 is contained in a concavity 74a of the disk container 74. A pick-up cover 78 having an opening 78a that is as large as the range of movement of the object lens 12 of the optical pick-up device 10 covers the concavity 74a.

【0029】

The opening 78a in the pick-up cover 78 extends in a direction that is at a diagonal, that is, an angle of approximately 45 degrees with respect to the tray 70, that is, the direction indicated by an arrow Xa-Xb. The optical pick-up device 10 is also movable along the opening 78a in the pick-up cover 78 in the same diagonal direction.

An eject button 82 is provided on a center of a front bezel 80 joined to a proximal edge the tray 70.

【0030】

When a disk motor 69 provided beneath the turntable 68 is activated, thus rotating the turntable 68 and the disk 52 clamped onto

the turntable 68 by the clamping mechanism 73, the air at the center of the rotation is moved to the outer periphery of the disk by the centrifugal force of rotation.

【0031】

As shown in FIG. 7, the tray 70 is supported by guide rails 90, 92 along both sides thereof so that the tray 70 is slidable in the proximal and distal directions. When the eject button 82 provided on the front bezel 80 is pressed, the tray 70 lock is released and the released tray 70 is slid manually in the direction shown as Xa in FIGS. 7 to a point at which the disk may be replaced. After the disk 52 has been clamped onto the turntable 68 of the tray 70, the tray 70 is then pushed manually back in the direction shown as Xb in FIGS. 7 until locked in a disk loaded position shown in FIG. 7.

【0032】

A description will now be given of a pick-up drive mechanism 84 that moves the optical pick-up device 10 in a radial direction of the disk.

As shown in FIGS. 7 and 8, the pick-up drive mechanism 84 comprises a pair of guide shafts 85, 86 that guide the optical pick-up device 10 in a diagonal direction indicated by the dashed lines in FIG. 7, a drive motor 87 that drives the optical pick-up device 10, and a transmission mechanism 88 that transmits the rotational drive force of the drive motor 87 to the optical pick-up device 10. Bearings 76a, 76b and 76c project from both lateral surfaces of the optical pick-up device 10 and are fitted to the guide shafts 85, 86, such that the optical pick-up device is guided by the guide shafts 85, 86. The transmission mechanism 88 comprises a gear assembly 88a that reduces the rotation of the drive motor 87 and a lead screw 88b that is rotatably driven via the gear assembly 88a. The optical pick-up device 10 has an engaging part 76d that engages the threads of the lead screw 88b.

【0033】

FIG. 9 is a plan view of a disk drive, a double-headed arrow showing a direction of movement of the optical pick-up device.

As shown in FIG. 9, the optical pick-up device 10 is moved along the diagonal of the tray 70 by the transmission of the rotation of the drive motor 87 to the lead screw 88b via the gear assembly 88a.

【0034】

FIG. 10 shows a load acting on an optical pickup device according to the present invention when the disk device has been dropped.

As shown in FIG. 10, when the disk drive unit 61 is dropped on

the front bezel 80, a force F acts in a direction E on the optical pick-up device because the optical pick-up device 10 is designed to move along the diagonal of the tray 70. In such a case, the force of impact F acts on the optical pick-up device 10 at an angle of approximately 45 degrees with respect to the direction in which the four cantilever springs 26a-26d extend. Additionally, because the force of impact F acts downward with respect to the center of gravity G of the lens holder 14, a rotational moment M is generated about the center of gravity G .

【0035】

As a result, the lens holder 14, supported as it is by the four cantilever springs 26a-26d, moves in the direction E in which the force of impact F acts. Initially the second projection 38a contacts the inner surface of the arm 15a of the frame 15, and then the third projection 39a contacts the distal end 14c of the lens holder 14 so that the lens holder 14 does not rotate in the clockwise direction (see FIG. 5).

Accordingly, even when the disk drive unit 61 is dropped a rotational moment due to the force of impact F does not affect the lens holder 14 and thus damage to the four cantilever springs 26a-26d can be prevented.

【0036】

FIG. 11 is a schematic diagram showing a direction of effect of a rotational moment in the event of a force of impact acting in directions H , I on a lens holder center of gravity G .

As shown in FIG. 11, in the case of a force of impact operating in directions H , I on the lens holder 14 center of gravity G , the rotational moment M acts in the H' , I' directions. However, a rotation of the lens holder 14 is prevented by the first set of projections 37a, 37b projected from the proximal end of the lens holder 14 and the second set of projections 38a, 38b contacting the inner surfaces of the arms 15a, 15b of the frame 15. Accordingly, a rotation moment M in the H' , I' directions is prevented by the first set of projections 37a, 37b and the second set of projections 38a, 38b.

【0037】

FIG. 12 is a schematic diagram showing a direction of effect of a rotational moment in the event of a force of impact acting in directions J , K on a lens holder center of gravity G .

As shown in FIG. 12, in the case of a force of impact operating in directions J , K on the lens holder 14 center of gravity G , the rotational moment M acts in the J' , K' directions. However, a rotation

of the lens holder 14 is prevented by the second set of projections 38a, 38b projected from the lateral surfaces of the lens holder 14 contacting the inner surfaces of the arms 15a, 15b of the frame 15 and by the third set of projections 39a, 39b provided on the suspension holder 24 contacting the distal end 14c of the lens holder 14. Accordingly, a rotation moment M in the J', K' directions is prevented by the second set of projections 38a, 38b and the third set of projections 39a, 39b.

As can be appreciated by those of ordinary skill in the art, although the present invention has been described with reference to embodiments in which projections functioning as stoppers are provided on the lateral surfaces of the lens holder 14 and on the suspension holder 24, the present invention is not limited to such embodiments but includes also configurations in which, for example, projections that prevent a rotation of the lens holder 14 are provided on the lateral surfaces of the frame 15.

【Effect of Invention】

As the above-mentioned, according to the present invention in claim 1, because a plurality of projections which limit the movement of the lens holder to the lens holder or the frame is provided, it can be prevented the excess displacement the lens holder by any impact and can be prevented to distort the cantilevered springs without acting the rotation moment to the lens holder.

【0038】

According to the present invention in claim 2, because a plurality of projections is provided at least on the left or right side of the tip of the lens holder or the side of the frame, it can be prevented the excess displacement of the lens holder by the impact and can be prevented to distort the cantilevered springs without acting the rotation moment to the lens holder.

【0039】

Furthermore, according to the present invention in claim 3, because the plurality of projections is provided at least on the left or right side of the tip of the lens holder or the distal end of the lens holder, it can be prevented the excess displacement of the lens holder by the impact and can be prevented to distort the cantilevered springs without acting the rotation moment to the lens holder.

【Brief Explanation of the Drawings】

【Figure 1】 A perspective view of an optical pickup device according to one embodiment of the present invention.

【Figure 2】 A plan view of an optical pick-up device according to one embodiment of the present invention.

【Figure 3】 A lateral cross-sectional view of an optical pick-up device according to one embodiment of the present invention.

【Figure 4】 A perspective exploded view of a movable part and a yoke base that supports the movable part.

【Figure 5】 A plan view showing a case in which an impact acts in a direction B on an optical pick-up device 10 according to the present invention.

【Figure 6】 A perspective view of a disk drive unit.

【Figure 7】 A plan view of a disk drive unit.

【Figure 8】 A plan view of a disk drive unit with the tray extended.

【Figure 9】 A plan view of a disk drive, a double-headed arrow showing a direction of movement of the optical pick-up device.

【Figure 10】 A load acting on an optical pickup device according to the present invention when the disk device has been dropped.

【Figure 11】 A schematic diagram showing a direction of effect of a rotational moment in the event of an impact acting in directions H, I on a lens holder center of gravity G.

【Figure 12】 A schematic diagram showing a direction of effect of a rotational moment in the event of an impact acting in directions J, K on a lens holder center of gravity G.

【Explanation of Notation】

10	optical pick-up device
12	object lens
14	lens holder
15	yoke base
16	focus coil
18	tracking coil
24	suspension holder
26a~26d	elastic supports
30, 32	magnet
37a, 37b	first set of projections
38a, 38b	second set of projections
39a, 39b	third set of projections
42	coil relay substrates
44	coil relay substrates
50	reflecting mirror
52	disk
61	disk drive unit

68	turntable
69	disk motor
70	tray
73	clamp mechanism
78	pick-up cover
84	pick-up drive mechanism
85, 86	guide shaft
88	transmission mechanism

【Name of Document】 Abstract

【Abstract】

【Problems】 The object of the present invention provide the distortion of the elastic support having a cantilevered structures rotatably moving the lens holder.

【Means】 A lens holder 14 of an optical pick-up device 10 according to the present invention project with a first set of projections 37a, 37b in the lateral directions, and project a second set of projections at the intermediate position. Additionally, A third set of projections 39a, 39b project at a suspension holder 24 oppositely displaced behind of the lens holder 14. When the lens holder 14 moves laterally, the first set of projections 37a, 37b and the second set of projections 38a, 38b is come into contact with a interior surface of a pair of arms 15a, 15b of a yolk base 15 and prevent to rotatably being moved the lens holder 14. Furthermore, the distal end 14c of the lens holder 14 is come into contact with the third set of projections 39a, 39b, and prevented to being rotatably moved in the anti-clockwise movement. Thereby, four elastic support 26a to 26d supporting the lens holder 14 prevent the distortion thereof.


【Selected Figure】 Figure 1




書類名】

図面


【図1】 Fig. 1

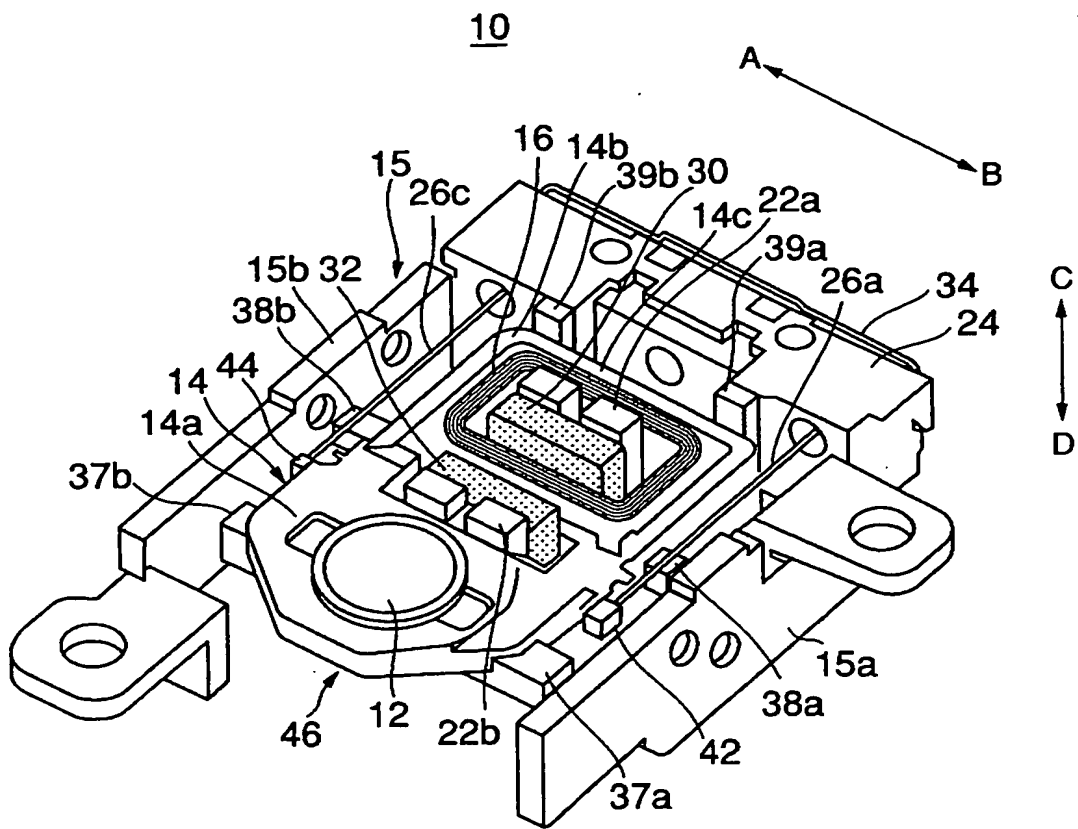

【図2】 Fig. 2

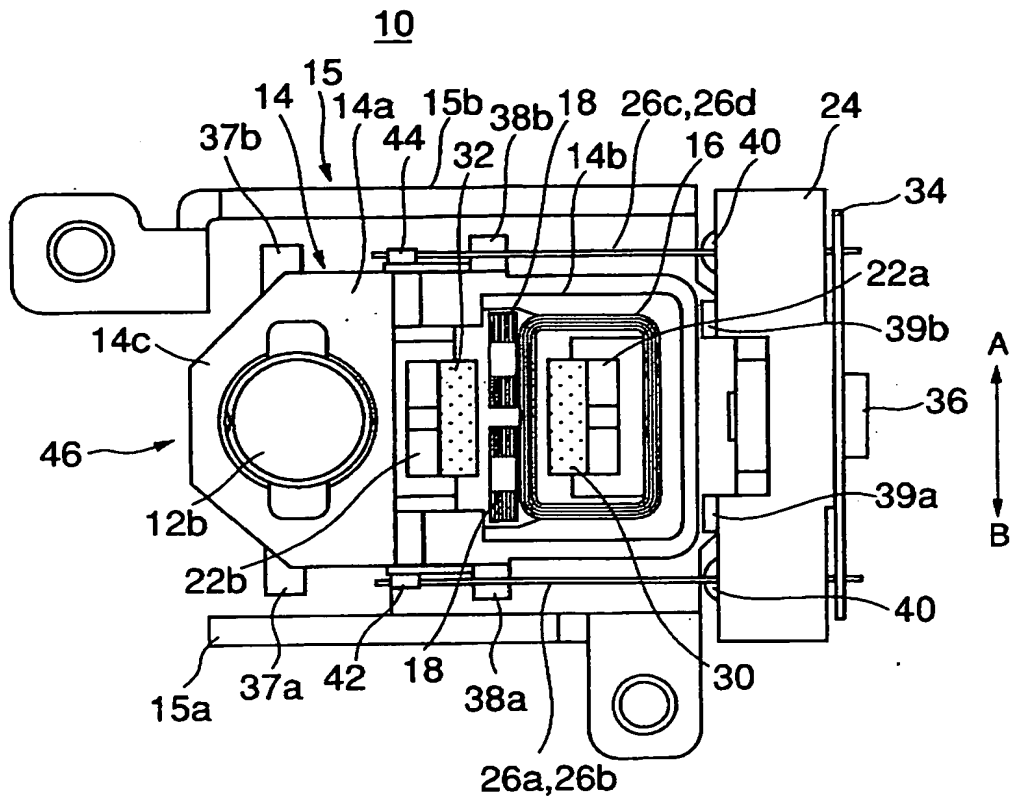


【図3】 Fig. 3

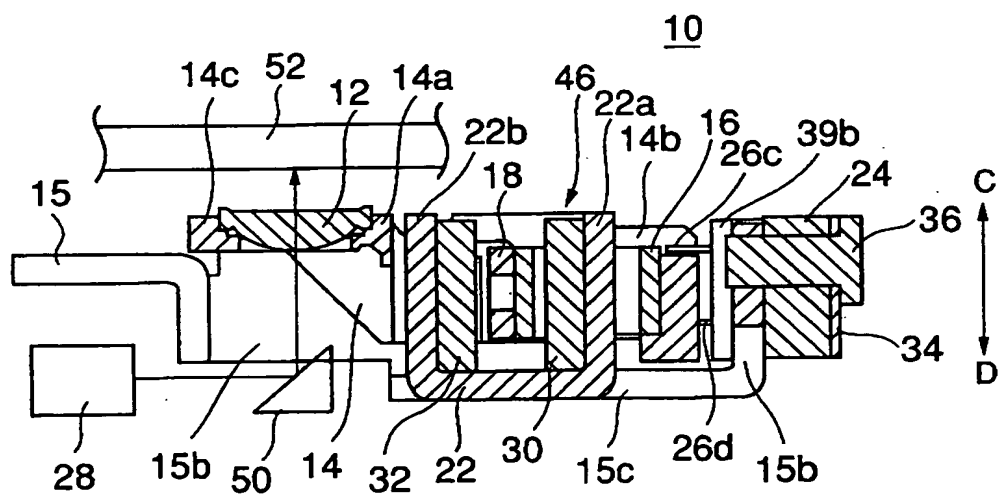





【図4】 Fig. 4

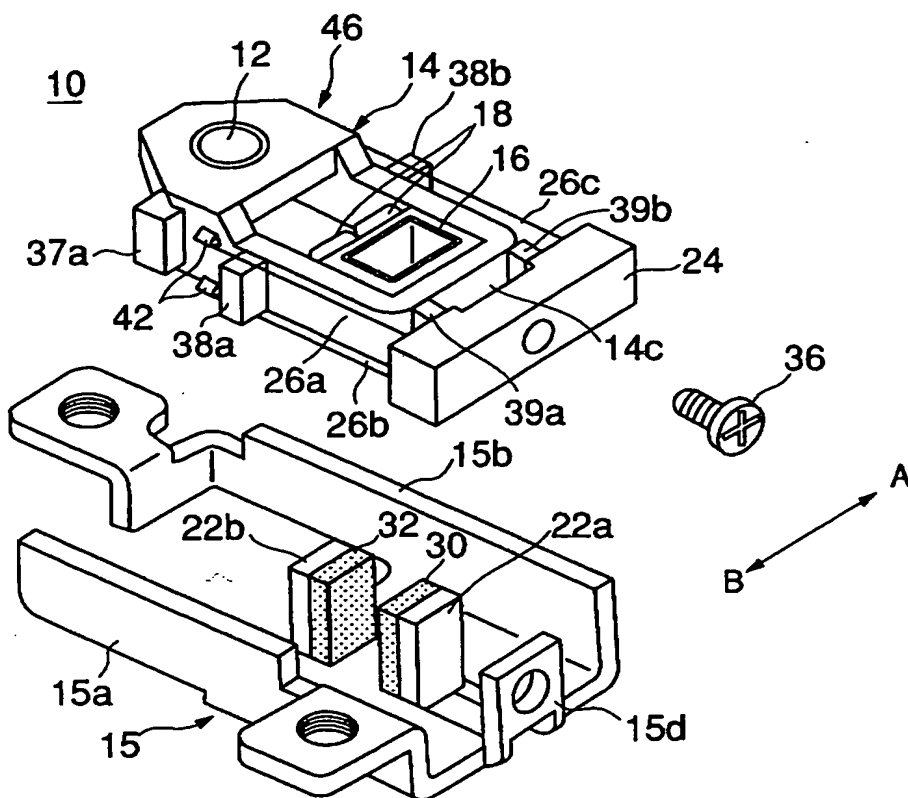


【図5】 Fig. 5

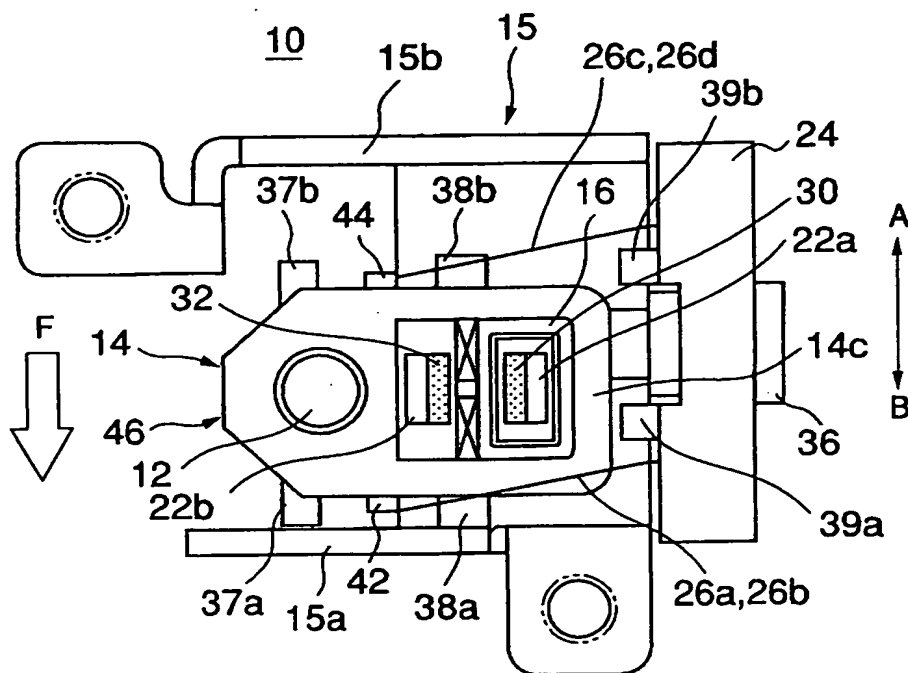

【図6】 Fig. 6

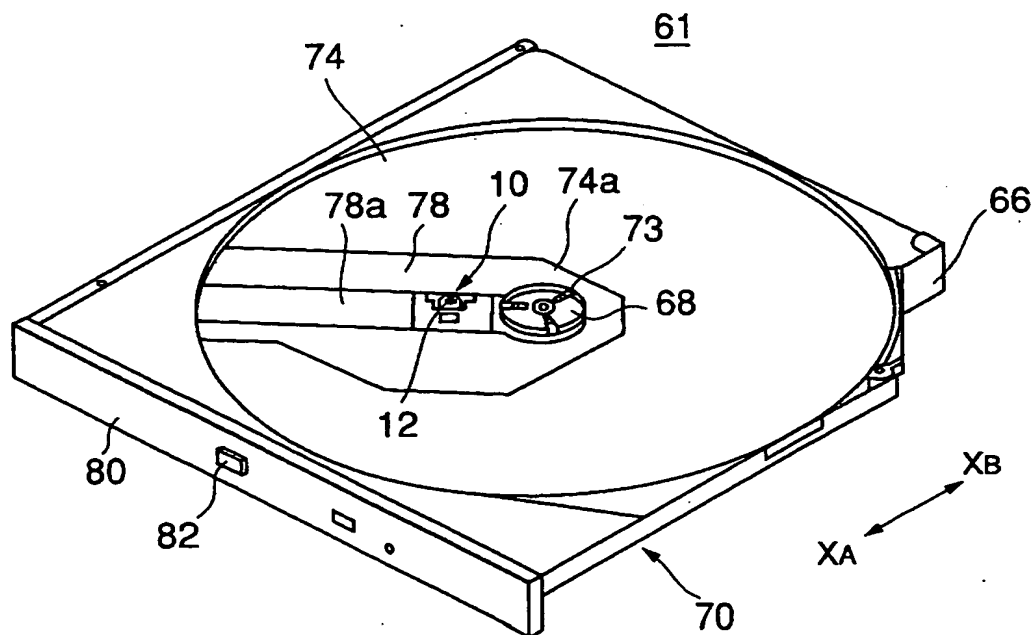


【図7】 Fig. 7

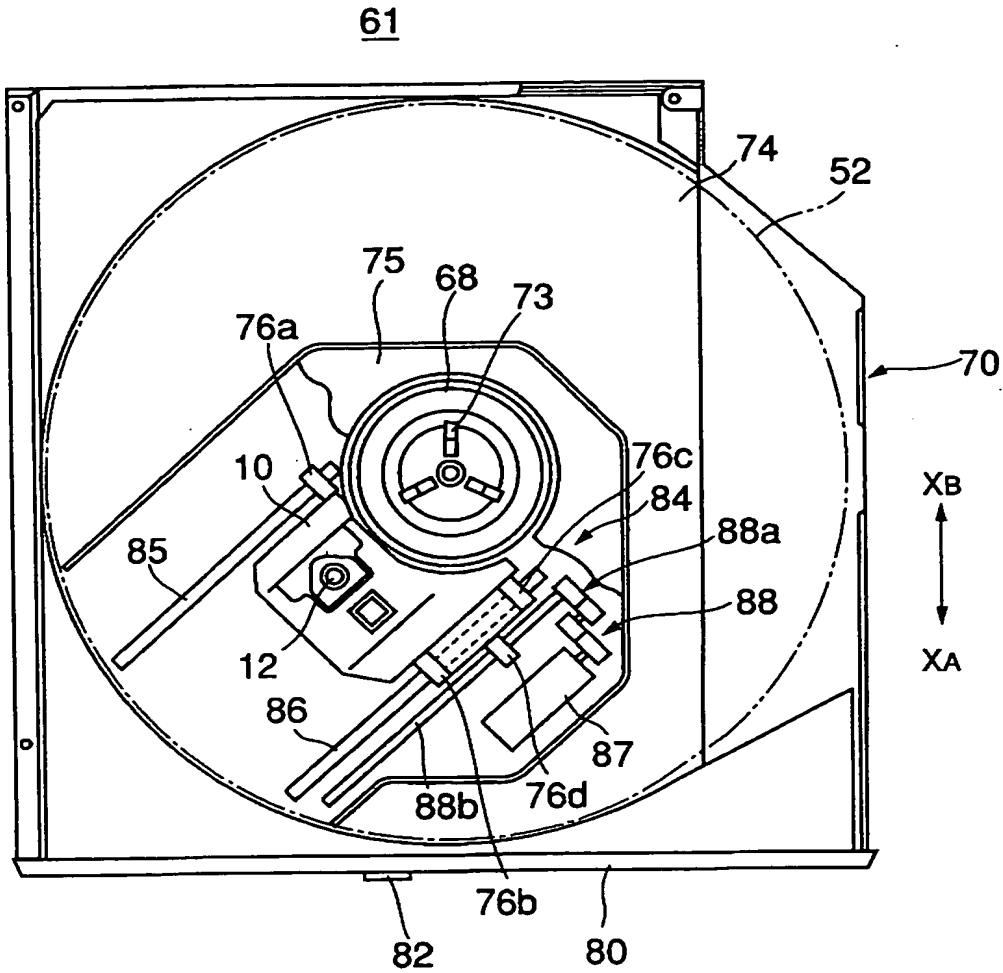


特許番号=TEP001001A


【図8】 Fig. 8

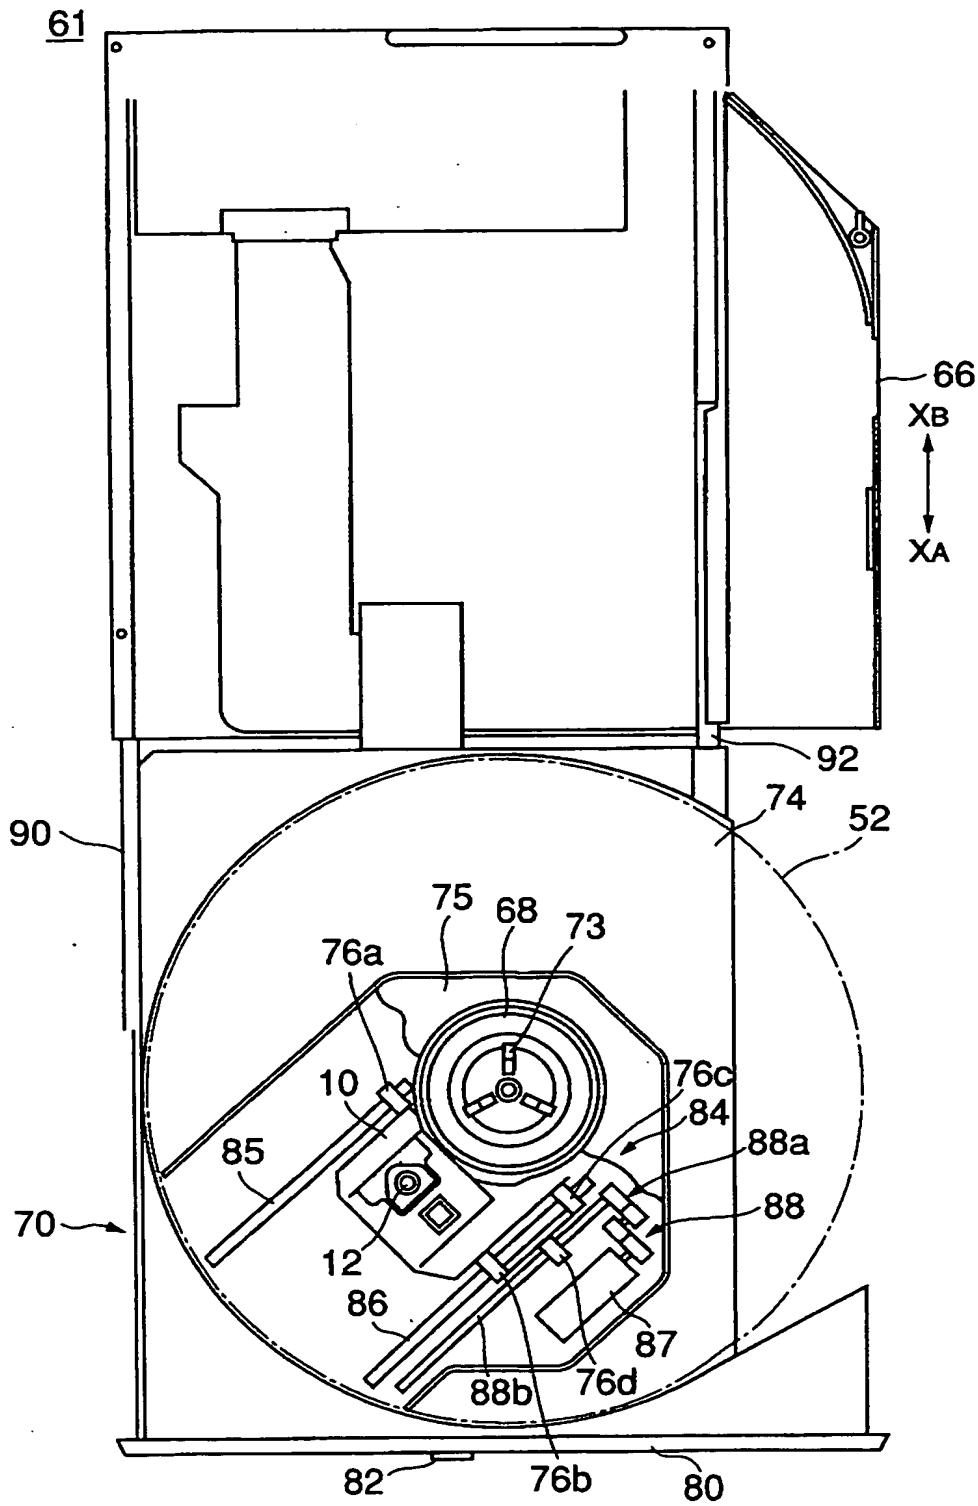

61

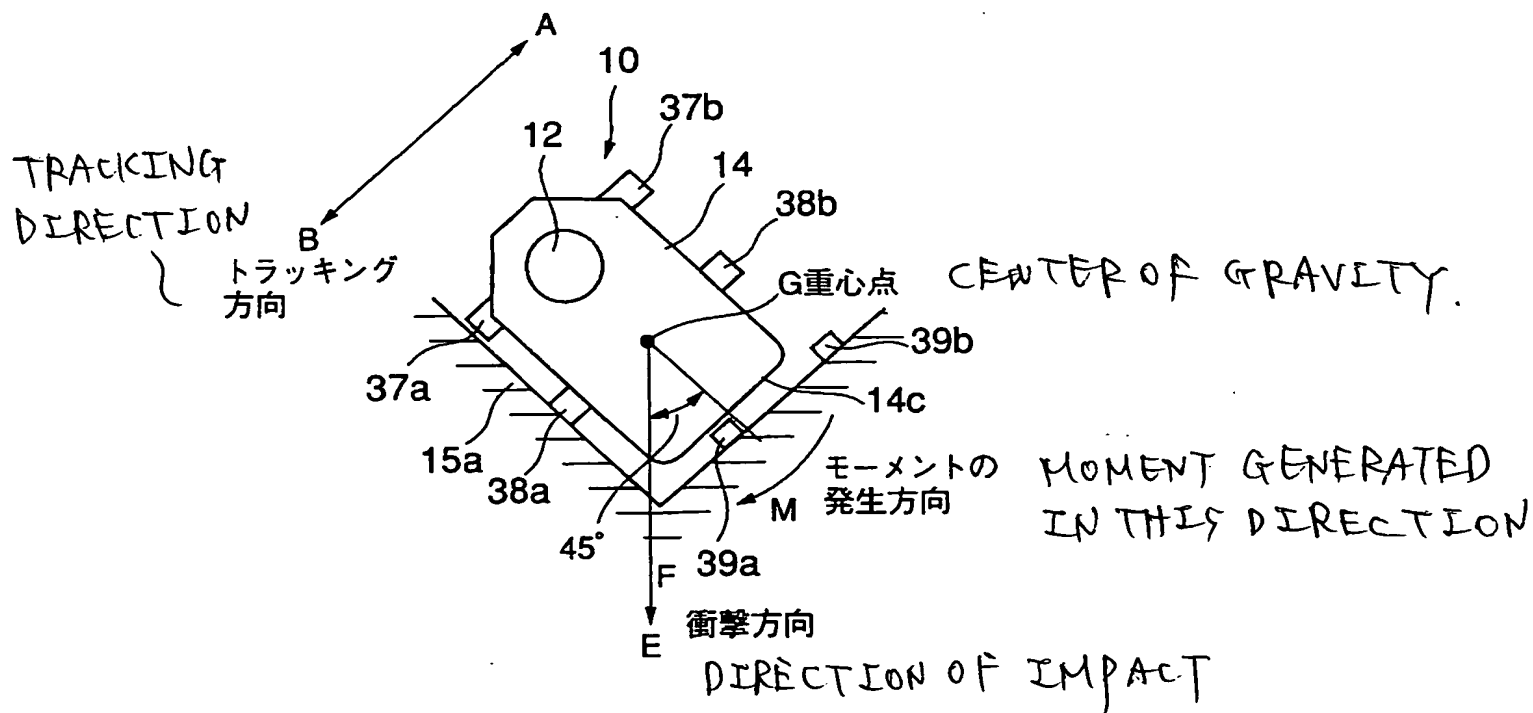

【図11】 Fig. 11

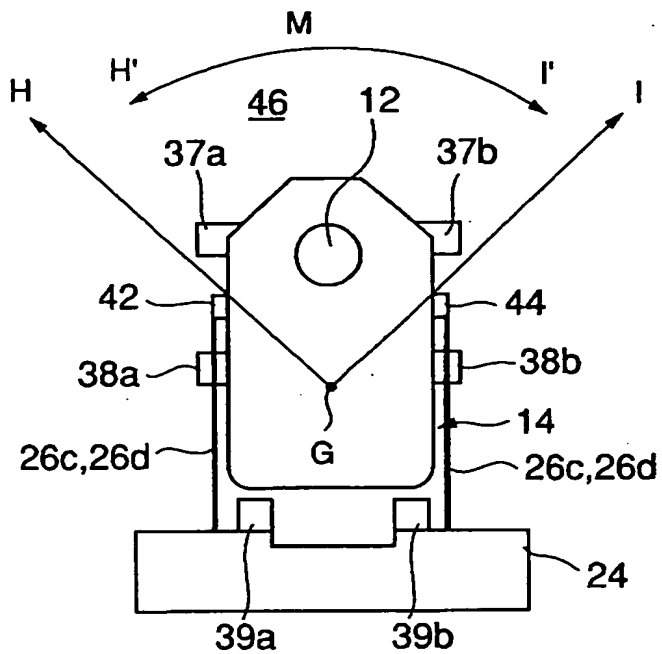

【図12】 Fig. 12

